


## Fast Switching Diode

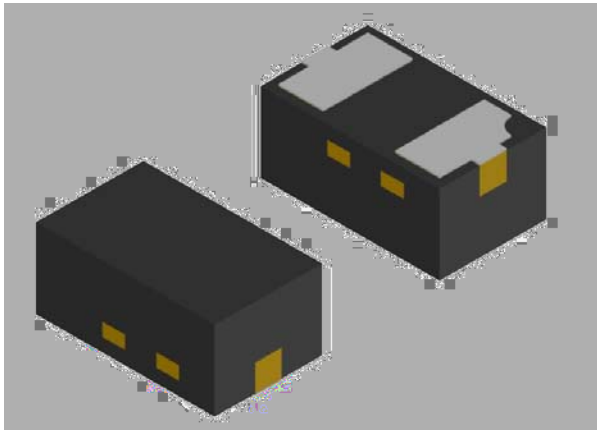


### Features

### Mechanical Data

Package  
Terminals

Polarity  
Marking



### Maximum Ratings

°C

)

PARAMETER	SYMBOL	UNIT	Conditions	VALUE

### Ordering Information

PREFERRED P/N	UNIT WEIGHT(mg)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE




**1N4148WL2**




# 1N4148WL2

RoHS  
COMPLIANT

## Characteristics

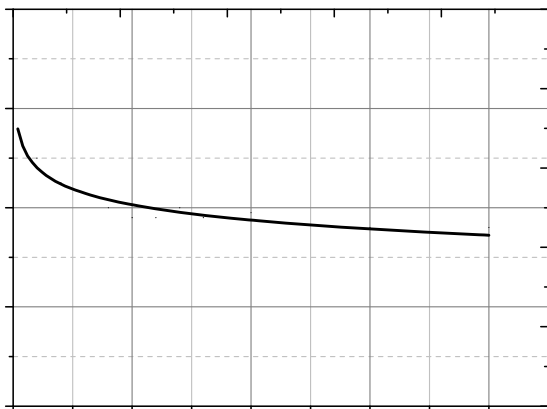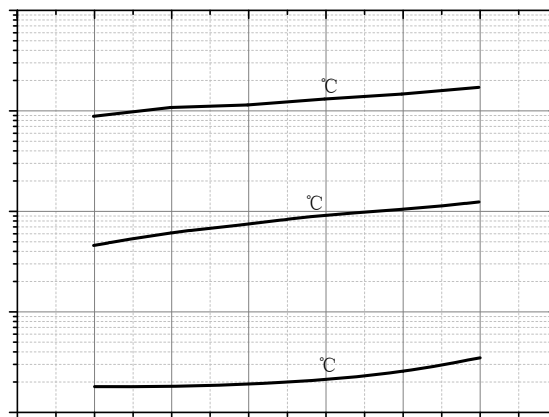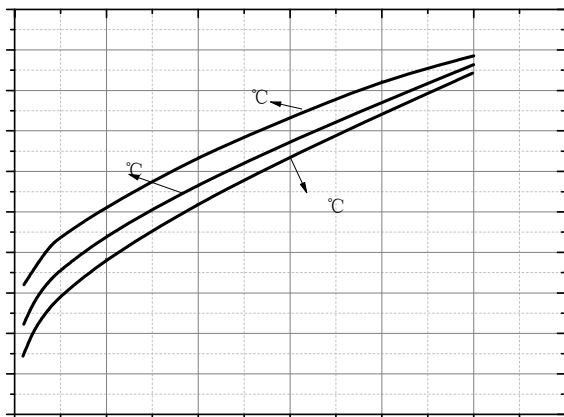


## Outline Dimensions

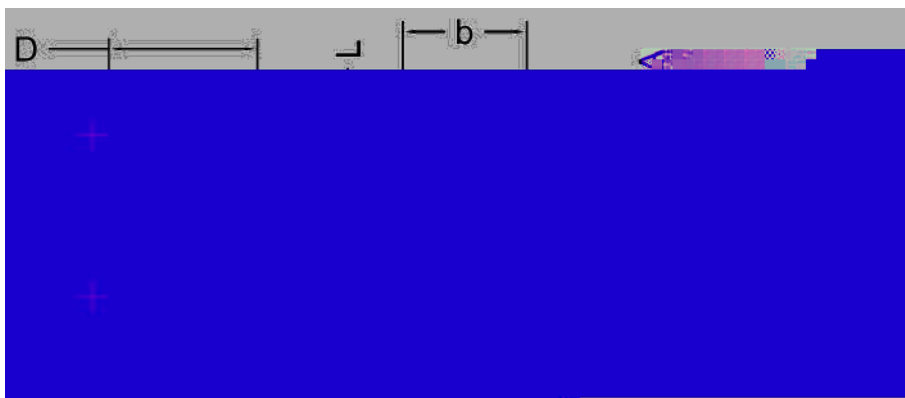

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
D	0.50	0.60	0.70
E	0.90	1.00	1.10
A	0.35	0.45	0.55
A1	0.15 BSC		
A2			0.10
F	0.005		
G	0.005		
L	0.15	0.25	0.35
b	0.41	0.50	0.59
e	0.65 BSC		

## Soldering Footprint





# 1N4148WL2

RoHS  
COMPLIANT

---

Disclaimer

---

---