





Small-Signal Fast Switching Diodes

O³
O³
O³
O³
O³
O³
O³
O³
O³
O³
O³
O³
O³
O³
O³
O³
O³
O³
O³

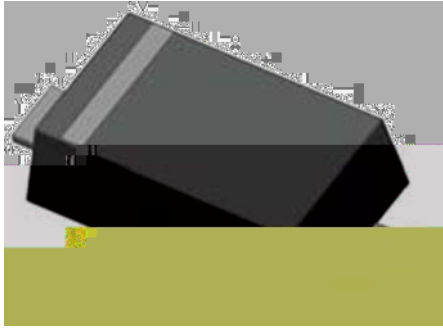

Features

- O³
- o!
- o!

Application

-
-

Mechanical data

- Package! O³
- Terminals! O³

Maximum Ratings qà

Parameter	Symbol	Unit	Value
		-	
		-	

O³ O³



1SS400

RoHS
COMPLIANT

0³

Electrical Characteristics

Parameter	Symbol	Unit	Conditions	Min	Typ	Max

0³

Thermal Characteristics

0³

Parameter	Symbol	Unit	Value
		-	
		-	

0³



0³

0³

0³

0³

0³

0³

0³

0³

0³




1SS400

RoHS
COMPLIANT

Ordering Information


Preferred P/N	Packing code	Unit weight(g)	Minimum package(pcs)	Inner box quantity(pcs)	Outer carton quantity(pcs)	Delivery mode

Outline Dimensions

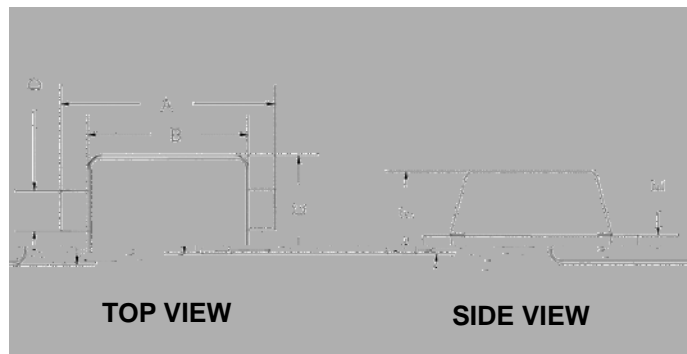

DIMENSIONS				
DIM	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.059	0.067	1.500	1.700
B	0.043	0.051	1.100	1.300
C	0.028	0.035	0.700	0.900
D	0.010	0.014	0.250	0.350
E	0.002	0.008	0.050	0.200
F	0.020	0.028	0.500	0.700

Suggested Pad Layout

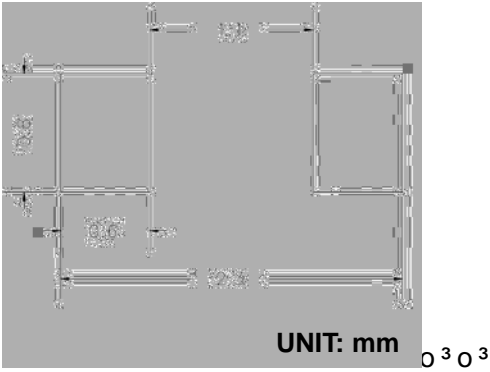

UNIT: mm



1SS400

RoHS

COMPLIANT

0³

Disclaimer

0³

0³