





**Electrical Characteristics**

Parameter	Symbol	UNIT	Conditions	Min	TYP	Max

**Thermal Characteristics**

Parameter	Symbol	Unit	Value



Characteristics

Fig 1 Pb-Ta Curve

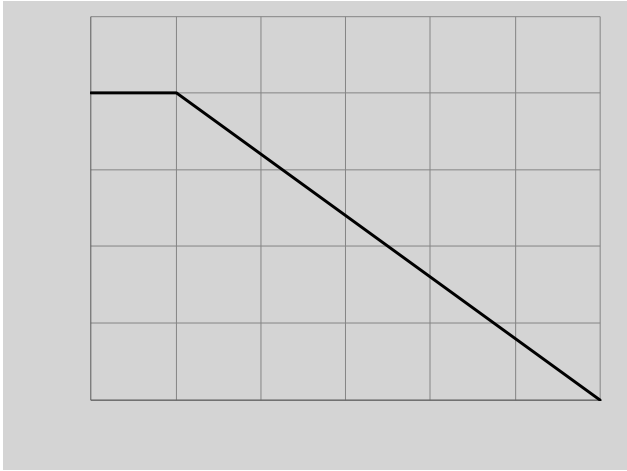


Fig 2 Capacitance Capability

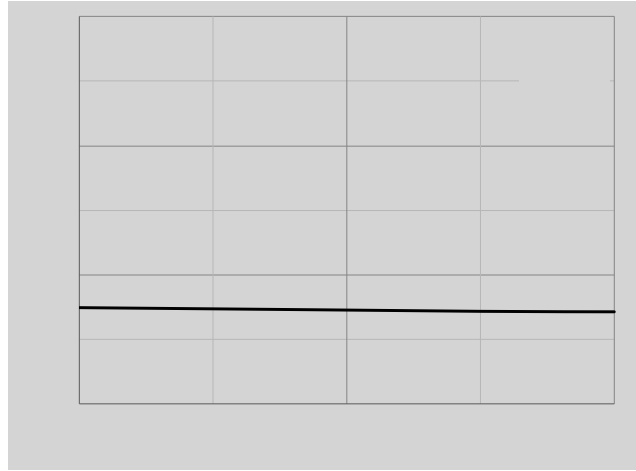


Fig 3 Typical Forward Characteristics


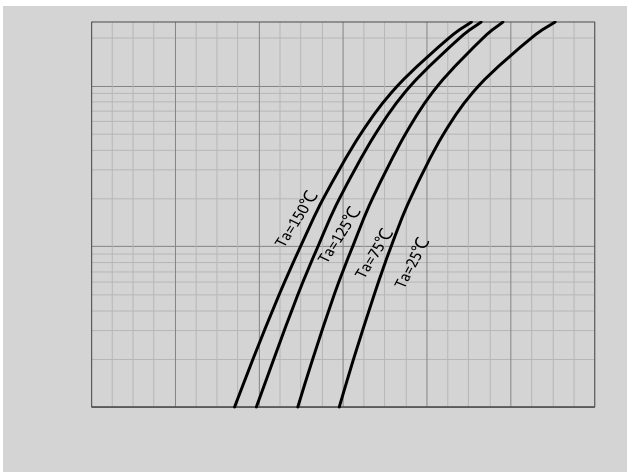


Fig 4 Typical Reverse Characteristics



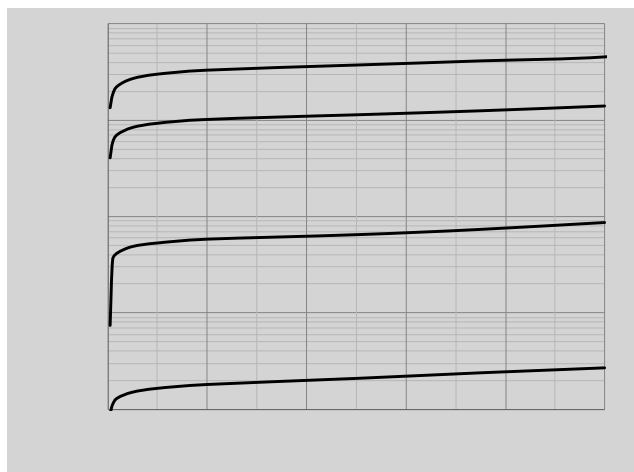


### Ordering Information

Preferred P/N	Packing code	Unit weight(g)	Minimum package(pcs)	Inner box quantity(pcs)	Outer carton quantity (pcs)	Delivery mode

### Outline Dimensions

SYMBOL	DIMENSIONS			
	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.035	0.043	0.900	1.100
A1	0.000	0.004	0.000	0.100
0.035 REF	0.000	0.000	0.000	0.000
0.018 REF	0.000	0.000	0.000	0.000
0.000 REF	0.000	0.000	0.000	0.000
0.007 REF	0.000	0.000	0.000	0.000
0.000 REF	0.000	0.000	0.000	0.000
0.008 REF	0.000	0.000	0.000	0.000
0.026 TYP	0.000	0.000	0.000	0.000
0.047 REF	0.000	0.000	0.000	0.000
0.024 REF	0.000	0.000	0.000	0.000
0.010 REF	0.000	0.000	0.000	0.000

### Suggested Pad Layout

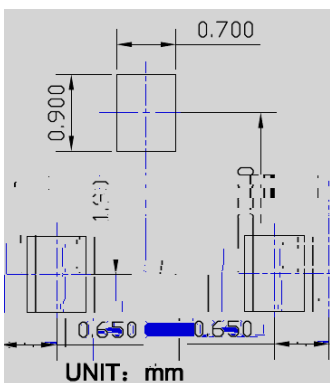



DAP202U

RoHS  
COMPLIANT

---

**Disclaimer**

